

ARCHITECTURAL SPECIFICATIONS

Table with columns: EXTERIOR FINISHES, FLOORING, INTERIOR WALL FINISHES, CEILING FINISHES, TOILET PARTITIONS, INTERIOR GLASS, EXTERIOR GLASS, TOILET ACCESSORIES, ANCILLARY ITEMS, ANCILLARY ITEMS, CONT., SOLID CORE DOORS, STEEL DOORS, OVERHEAD COILING DOORS. Includes detailed specifications for finishes, glazing, doors, and accessories.



Project Name: 3202 IH-69 North Frontage Rd., Robstown, TX, 78380, County Nissian

Project No: 15003

Date: October 14, 2015

Architectural Specifications-REV 07.12.30-16


Note: Refer to sheet A200 for General Notes

CB1-A600

EDR CB1 Room Finishes-NREDI 2.0

Room Number	Room Name	Ceiling			Wall					Floor	Millwork		Notes	
		Material	Finish	Height	N	S	E	W	Base		Counter	Cabinet Finish		
CB1-100	Showroom	Acoustical Lay-In / Suspended...	ACT-2 / C-2	19'-6"	P-1 / *WC-1 / *P-5 (*Below 10' Soffit)	P-1		P-1	P-1	CTB-2	CT-2/CPT-1/ST-1/ST-...	-	-	Refer to CB1-A901 for changes in flooring
CB1-101	Spine	Wood Look Ceiling	HW-1	10'-0"	P-1	P-1				CTB-2	CT-2 / TS-1 / TS-2	-	-	
CB1-102	Customer Lounge	Wood Look Ceiling	HW-1	10'-0"	P-1	P-1	WC-1 / P-5 Accent			CTB-2 / W...	CPT-1 (Vinyl)	-	-	
CB1-103	NVD	Acoustical Lay-In	ACT-2	10'-0"	P-1	P-1				CTB-1	CT-1 / CT-3 / TS-1	-	-	
CB1-104	Sales MNGRS	Wood Look Ceiling	HW-1	10'-0"	P-1 / SF-2	P-1				WB-1	CT-5 / TS-1	-	-	
CB1-106	Sales	Wood Look Ceiling	HW-1	10'-0"	P-1 / SF-2	P-1 / SF-2				WB-1	CT-5 / TS-1	-	-	
CB1-107	Sales	Wood Look Ceiling	HW-1	9'-0"	SF-2	P-1	WC-1 / P-5 Accent			WB-1	CT-5 / TS-1	-	-	
CB1-108	Sales	Wood Look Ceiling	HW-1	9'-0"	SF-2	SF-2	WC-1 / P-5 Accent			WB-1	CT-5 / TS-1	-	-	
CB1-109	Sales	Wood Look Ceiling	HW-1	9'-0"	SF-2	SF-2	WC-1 / P-5 Accent			WB-1	CT-5 / TS-1	-	-	
CB1-110	Sales	Wood Look Ceiling	HW-1	9'-0"	SF-2	SF-2	WC-1 / P-5 Accent			WB-1	CT-5 / TS-1	-	-	
CB1-111	Sales	Wood Look Ceiling	HW-1	9'-0"	SF-2	SF-2	WC-1 / P-5 Accent			WB-1	CT-5 / TS-1	-	-	
CB1-112	Sales	Wood Look Ceiling	HW-1	9'-0"	P-1	SF-2	WC-1 / P-5 Accent			WB-1	CT-5 / TS-1	-	-	
CB1-113	Sales	Wood Look Ceiling	HW-1	10'-0"	WC-1 / P-5		P-1 / SF-2			WB-1	CT-5 / TS-1	-	-	
CB1-114	Sales	Wood Look Ceiling	HW-1	10'-0"	WC-1 / P-5		P-1 / SF-2			WB-1	CT-5 / TS-1	-	-	
CB1-115	Sales	Wood Look Ceiling	HW-1	10'-0"	WC-1 / P-5		P-1 / SF-2			WB-1	CT-5 / TS-1	-	-	
CB1-116	Warranty Admin	Acoustic Lay-In	ACT-2	9'-0"	P-1	P-1				WB-1	CPT-3 (Carpet)	-	-	
CB1-117	Cashier	Acoustical Lay-In	ACT-2	9'-0"	P-1	P-1				WB-1	CT-5 / TS-1	OP/OI, Re: MEP	OP/OI, Re: M...	
CB1-118	Business Office	Acoustical Lay-In	ACT-2	9'-0"	P-1	P-1				WB-1	CPT-3 (Carpet)	-	-	
CB1-120	Office MNGR.	Acoustical Lay-In	ACT-2	9'-0"	P-1	P-1				WB-1	CPT-3 (Carpet)	-	-	
CB1-122	BDC	Acoustical Lay-In	ACT-2	9'-0"	P-1	P-1				WB-1	CPT-3 (Carpet)	-	-	
CB1-123	IT/ Phone	Acoustical Lay-In	ACT-2	9'-0"	P-1	P-1				CTB-2	CT-2	-	-	Refer to MEP for terminal board
CB1-124	Conference/ Training	Acoustical Lay-In	ACT-2	10'-0"	P-1	P-1				CTB-2	CT-2	QS-3	PL-2	
CB1-125	GM	Wood Look Ceiling	HW-1	10'-0"	P-1	P-1				WB-1	CT-5 / TS-1	-	-	
CB1-126	F&I	Wood Look Ceiling	HW-1	10'-0"	P-1	P-1				WB-1	CT-5 / TS-1	-	-	
CB1-127	F&I	Wood Look Ceiling	HW-1	10'-0"	P-1	P-1				WB-1	CT-5 / TS-1	-	-	
CB1-128	F&I	Wood Look Ceiling	HW-1	10'-0"	P-1	P-1				WB-1	CT-5 / TS-1	-	-	
CB1-129	Parts	Exposed to Structure	C-1 Dryfall	22'-0"	P-1 / P-5	P-1 / P-5	P-1 / P-5	P-1 / P-5	P-1 / P-5	WB-1	EF-3	-	-	P-1 above 72" and P-5 below 72"
CB1-130	Parts Drop off	Exposed to Structure	C-1 Dryfall	10'-0"	P-1 / P-5	P-1 / P-5	P-1 / P-5	P-1 / P-5	P-1 / P-5	WB-1	EF-3	-	-	P-1 above 72" and P-5 below 72"
CB1-131	Special Tools	Exposed to Structure	C-1 Dryfall	10'-0"	P-1	P-1				WB-1	EF-3	-	-	
CB1-132	Electrical	Exposed to Structure	C-1 Dryfall	10'-0"	P-1	P-1				WB-1	EF-3	-	-	
CB1-133	Fire Riser	Exposed to Structure	C-1 Dryfall	10'-0"	P-1	P-1				WB-1	EF-3	-	-	
CB1-134	Tech RR	Sag Resistant 1/2" Gyp. Board	CP-1 White	9'-0"	P-1 / FRP-1	P-1 / FRP-1	P-1 / FRP-1	P-1 / FRP-1	P-1 / FRP-1	CTB-2	EF-3	-	-	FRP to 8'-0" a.f.f.
CB1-135	Tech Locker	Sag Resistant 1/2" Gyp. Board	CP-1 White	9'-0"	P-1 / FRP-1	P-1 / FRP-1	P-1 / FRP-1	P-1 / FRP-1	P-1 / FRP-1	CTB-2	EF-3	SS-1 (Stainles...	PL-4	FRP to 8'-0" a.f.f.
CB1-136	Tech Lounge	Sag Resistant 1/2" Gyp. Board	CP-1 White	9'-0"	P-1	P-1				CTB-2	EF-3	QS-3	PL-4	
CB1-137	Parts MNGR	Acoustical Lay-In	ACT-2	9'-0"	P-1	P-1				WB-1	EF-3	-	-	
CB1-138	Tech Parts	Acoustical Lay-In	ACT-2	9'-0"	P-1	P-1				WB-1	EF-3	SS-1	PL-4	
CB1-139	Retail Parts	Acoustical Lay-In	ACT-2	9'-0"	P-1	P-1				WB-1	CT-5 / TS-1	OP/OI, Re: MEP	OP/OI, Re: M...	
CB1-140	Hall	Acoustical Lay-In	ACT-2	9'-0"	P-1	P-1	CWT-1 Stacked			CTB-2	CT-2	-	-	
CB1-141	Jan.	Acoustical Lay-In	ACT-2	9'-0"	P-1	P-1 / FRP-1	P-1 / FRP-1	P-1 / FRP-1	P-1 / FRP-1	CTB-2	CT-2	-	-	FRP to 8'-0" a.f.f.
CB1-142	Women	Acoustical Lay-In	ACT-2	9'-0"	CWT-1 Stacked/ CWT-2 Random	CWT-1 Stacked	CWT-1 Stacked/ CWT-2 Random	CWT-1 Stacked	CWT-1 Stacked	CTB-2	CT-2	QS-3	PL-2	Tile shall extend full height of walls. Re: Interior Elevations
CB1-143	Men	Acoustical Lay-In	ACT-2	9'-0"	CWT-1 Stacked/ CWT-2 Random	CWT-1 Stacked	CWT-1 Stacked	CWT-1 Stacked/ CWT-2 Random	CWT-1 Stacked	CTB-2	CT-2	QS-3	PL-2	Tile shall extend full height of walls. Re: Interior Elevations
CB1-144	Service Writer's	Acoustical Lay-In	ACT-2	10'-0"	P-1	P-1				CTB-1	CT-1	-	-	
CB1-145	Service MNGR	Acoustical Lay-In	ACT-2	9'-0"	P-1	P-1				CTB-1	CT-1	-	-	
CB1-146	Dispatch	Acoustical Lay-In	ACT-2	9'-0"	P-1	P-1				CTB-1	CT-1	-	-	
CB1-147	Express Offices	Acoustical Lay-In	ACT-2	9'-0"	P-1	P-1				CTB-1	CT-1	-	-	
CB1-148	Service Drive	Exposed to Structure	C-1 Dryfall	19'-0"	P-1 / P-5	P-5 Full Height	P-1 / P-5	P-1 / P-5	P-1 / P-5	AS-1	AutoStone 1 & 2	-	-	P-1 above 72" and P-5 below 72"-Full Height Plaster all Walls
CB1-149	Service Shop	Exposed to Structure	C-1 Dryfall	19'-0"	P-1 / P-5	P-1 / P-5	P-1 / P-5	P-1 / P-5	P-1 / P-5	AS-1	AutoStone 1 & 2	-	-	P-1 above 72" and P-5 below 72"-Liner Panel to 7'-6"
CB1-150	Make Ready	Exposed to Structure	C-1 Dryfall	20'-0"	P-1 / P-5	P-1 / P-5	P-1 / P-5	P-1 / P-5	P-1 / P-5	-	EF-3	-	-	P-1 above 72" and P-5 below 72"-Liner Panel to 7'-6"
CB1-151	Air Comp. / Bulk Oil	Exposed to Structure	C-1 Dryfall	20'-0"	P-1	P-1				-	EF-3	-	-	
CB1-152	Car Wash	Exposed to Structure	C-1 Dryfall	20'-0"	Epoxy Paint	Epoxy Paint	Epoxy Paint	Epoxy Paint	Epoxy Paint	-	EF-3	-	-	Full Height 4" CMU Veneer on interior
CB1-153	Equipment	Exposed to Structure	C-1 Dryfall	20'-0"	Epoxy Paint	Epoxy Paint	Epoxy Paint	Epoxy Paint	Epoxy Paint	-	EF-3	-	-	Full Height 4" CMU Veneer on interior
CB1-154	AutoButler	Exposed to Structure	C-1 Dryfall	20'-0"	Epoxy Paint	Epoxy Paint	Epoxy Paint	Epoxy Paint	Epoxy Paint	-	EF-3	-	-	
CB1-155	Closet	Exposed to Structure	C-1 Dryfall	10'-0"	Epoxy Paint	Epoxy Paint	Epoxy Paint	Epoxy Paint	Epoxy Paint	-	EF-3	-	-	

Note:
 1. Refer to sheet A200 for General Notes.
 2. Refer to sheet A600 and A608 for Finish Schedules.

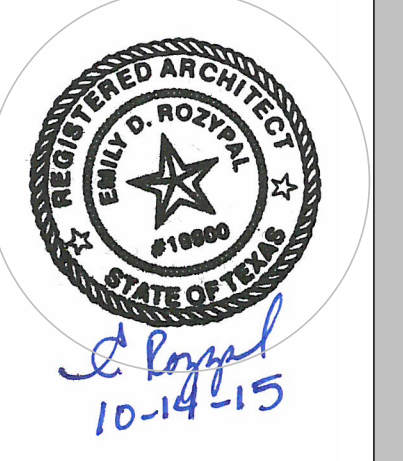

07 REV-December 30, 2016
 06 REV-August 25, 2016
 05 REV-June 24, 2016
 04 REV-February 10, 2016
 03 REV-November 16, 2015
 02 REV-October 3, 2015
 01 REV-October 27, 2015

Project Address:
 3202 IH-69 North
 Frontage Rd., Robstown,
 TX, 78380, County

Project Name:
 Hicks Family
 Nissan

Date:
 October 14, 2015

Room Finish Schedule-REV 08 01-04-TY
 Project No:
 15003

CB1-A601